




7415 Diley Road
Canal Winchester, OH 43110


Phone (614) 837-8444
Toll Free (800) 438-2880
Fax (614) 837-1198

60" I.D. MANHOLE COMPONENTS


On Target for Quality Precast Concrete Products and Waste Water Treatment Systems

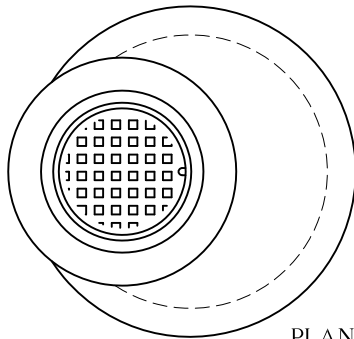


PLAN VIEW

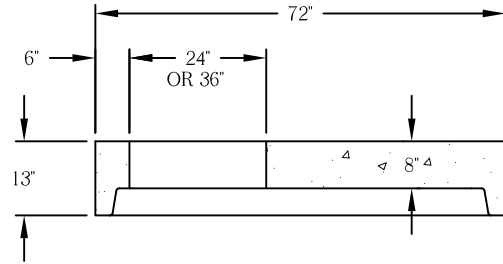


FLAT SLAB TOP

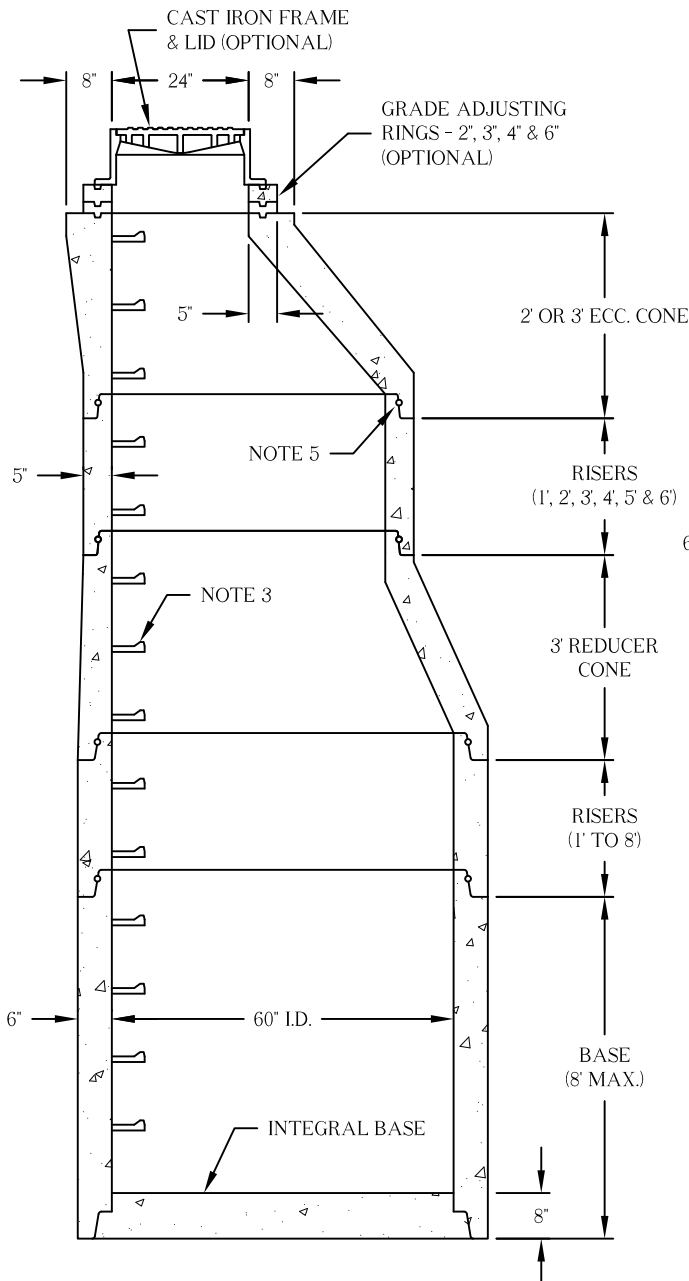

SECTION VIEW

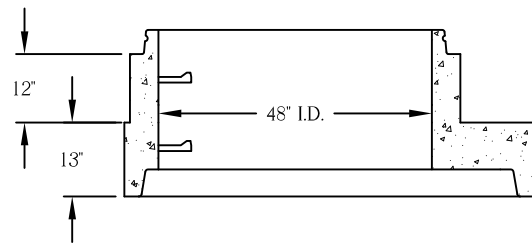

ALTERNATE TRANSITION SLAB

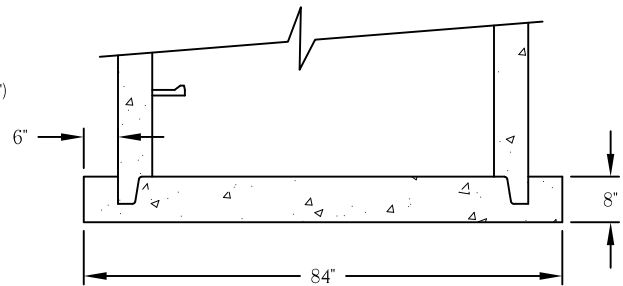

ALTERNATE EMBEDDED BASE

NOTES:

1. Concrete 4,500 P.S.I. at 28 days minimum.
2. Conforms to ASTM C-478.
3. Steps are M.A. Industries polypropylene (or equal), on 12" centers.
4. Precast flow channels are available.
5. O-ring joints meets ASTM C-443.
6. Manhole design conforms to City of Columbus std. construction drawings AA-S101, 102, 106, 107 & ODOT MH-3.
7. Oversized holes for pipe on storm or gaskets for sanitary.