


COMBINED CURB & GUTTER INLET

On Target Tor Quality Precast Concrete Products and Waste Water Treatment Systems

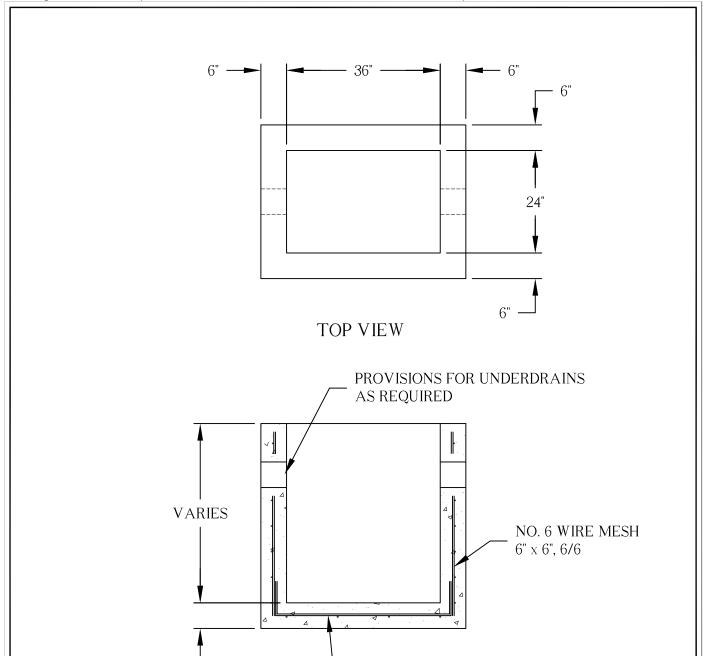

SECTION VIEW

NO. 4 BAR 12" O.C.E.W.

NOTES:

- 1. Concrete 4,000 P.S.I. at 28 days minimum.
- 2. Cast iron is optional.
- 3. Steps are M.A. Industries polypropolene, on 12" centers.
- 4. Holes for pipe are 2" larger than pipe O.D.
- 5. Conforms to City of Columbus standard construction drawing AA-S125.

STM-1